




- 1) Log in to TDSERVER2B
- 2) Start the DoubleTake management Console

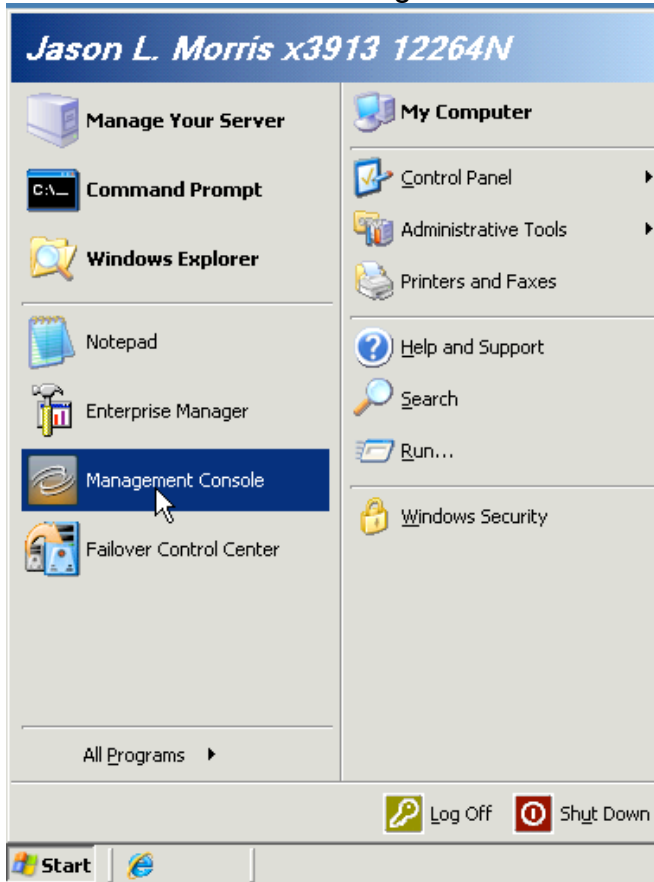


- 3) Right-Click on the TDSERVER2 node and choose "LOGON"

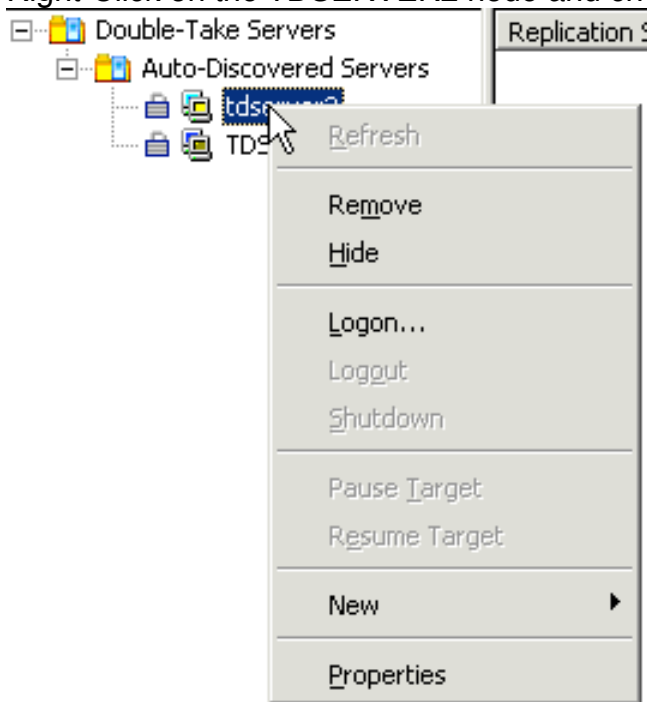


- 4) Enter your admin level user name and password to log on.
- 5) On the right hand side of the console, you should see two replication sets. Select both of them, and then right-click. Choose TRANSMIT -> PAUSE to stop the replication.

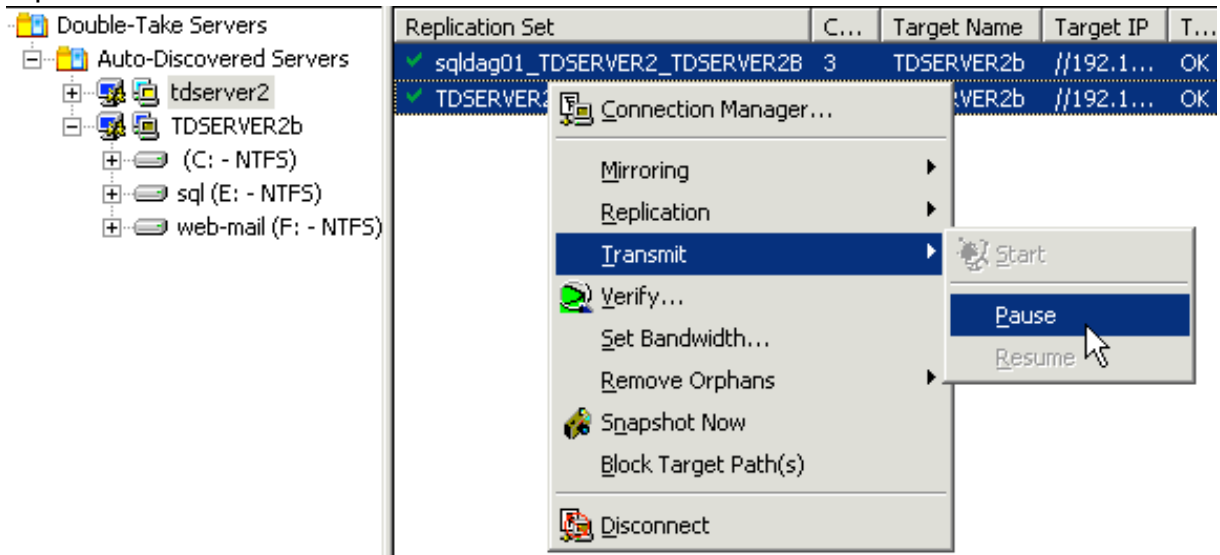

- 6) From the menu bar, choose "Tools" and then select "Failover Control Center"

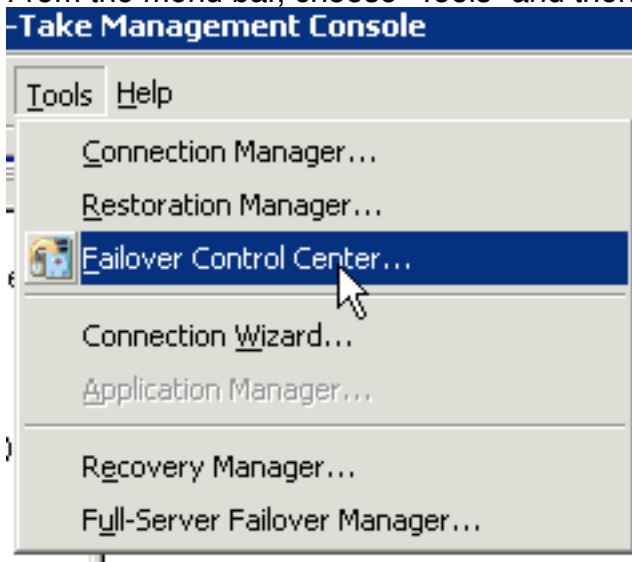

7) From the drop-down list, select TDSERVER2B and choose “Login”

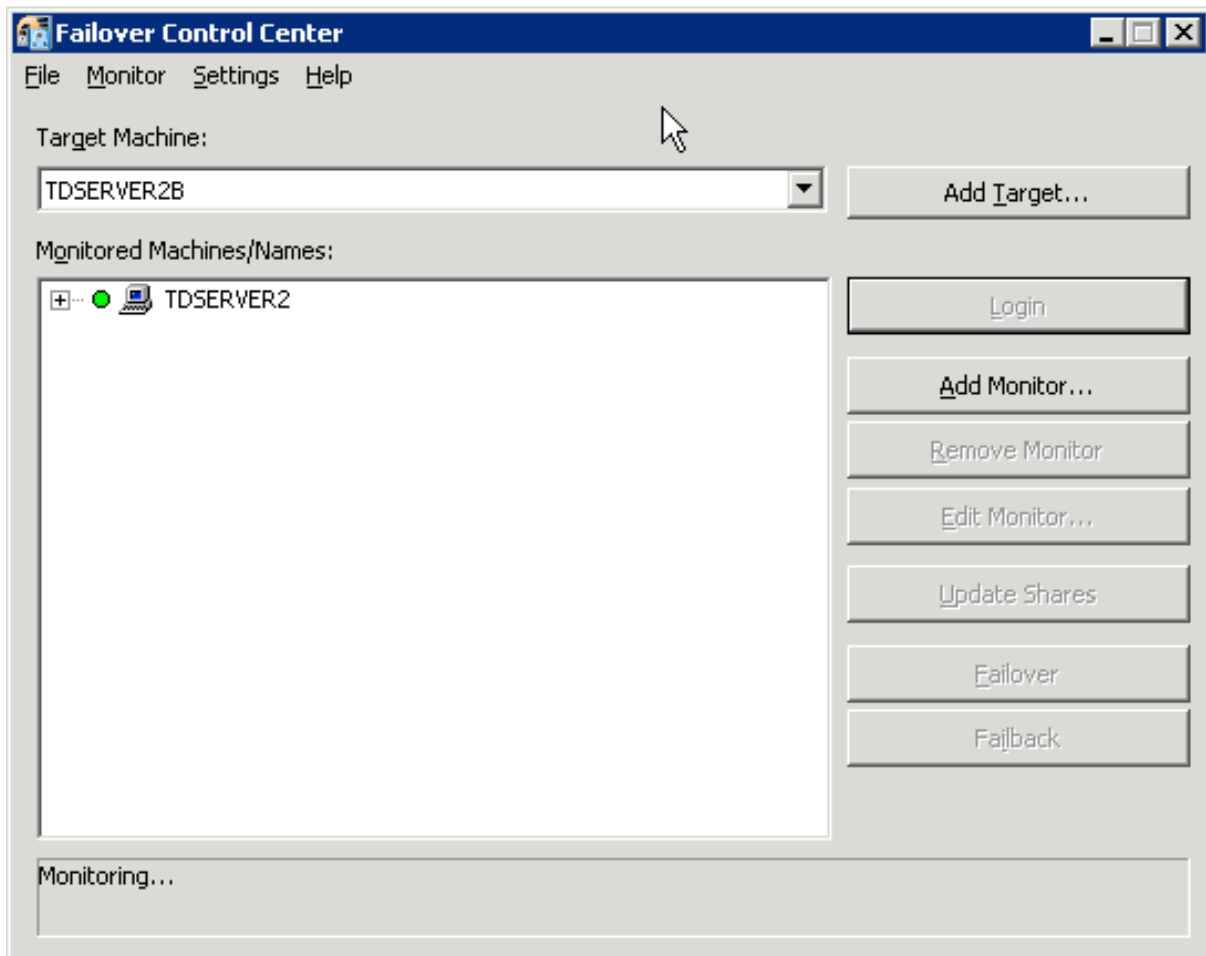


8) Select TDSERVER2, and choose “Remove Monitor”


9) Close the consoles, Patch and reboot both TDSERVER2 & TDSERVER2B.

10) Once both machines are rebooted, log back into the DoubleTake Management Console.


- 11) Log on to the TDSERVER2 node, right click on the replication sets, and resume replication.

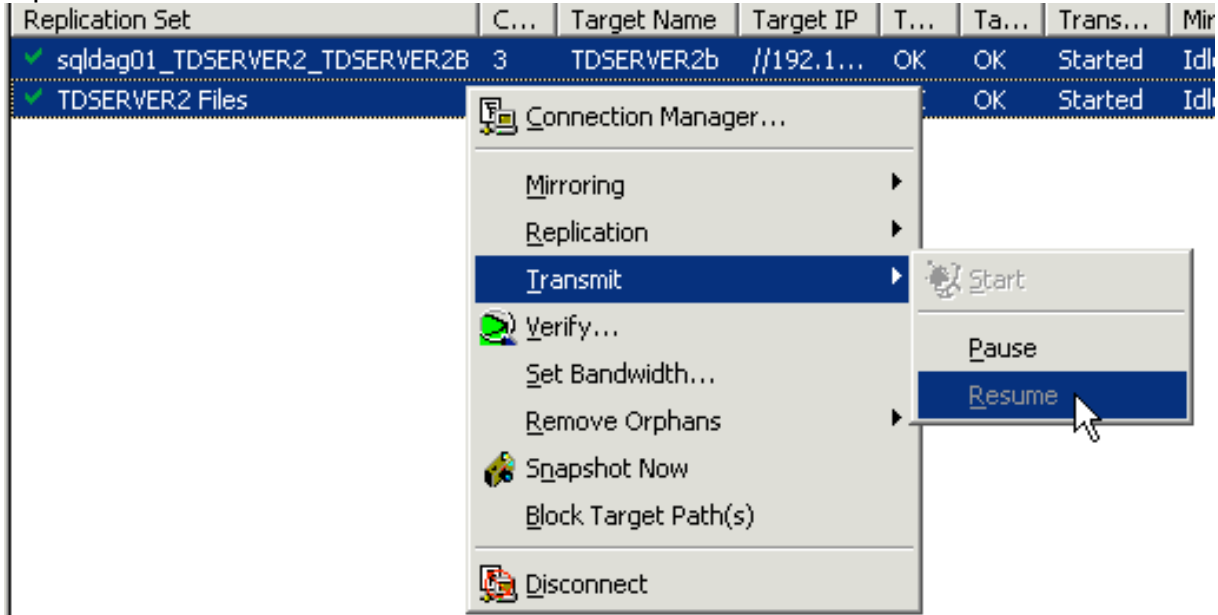

- 12) Open the Failover Control Center, select “TDSERVER2B” from the drop-down, and login to it.
13) Click “Add Monitor” and in the pop-up box, enter TDSERVER2.

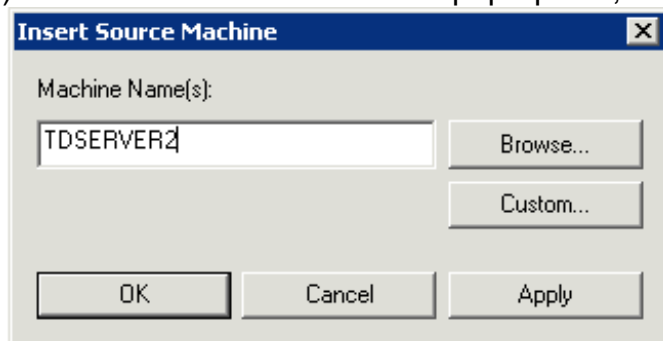

14) The settings should automatically be configured as below:

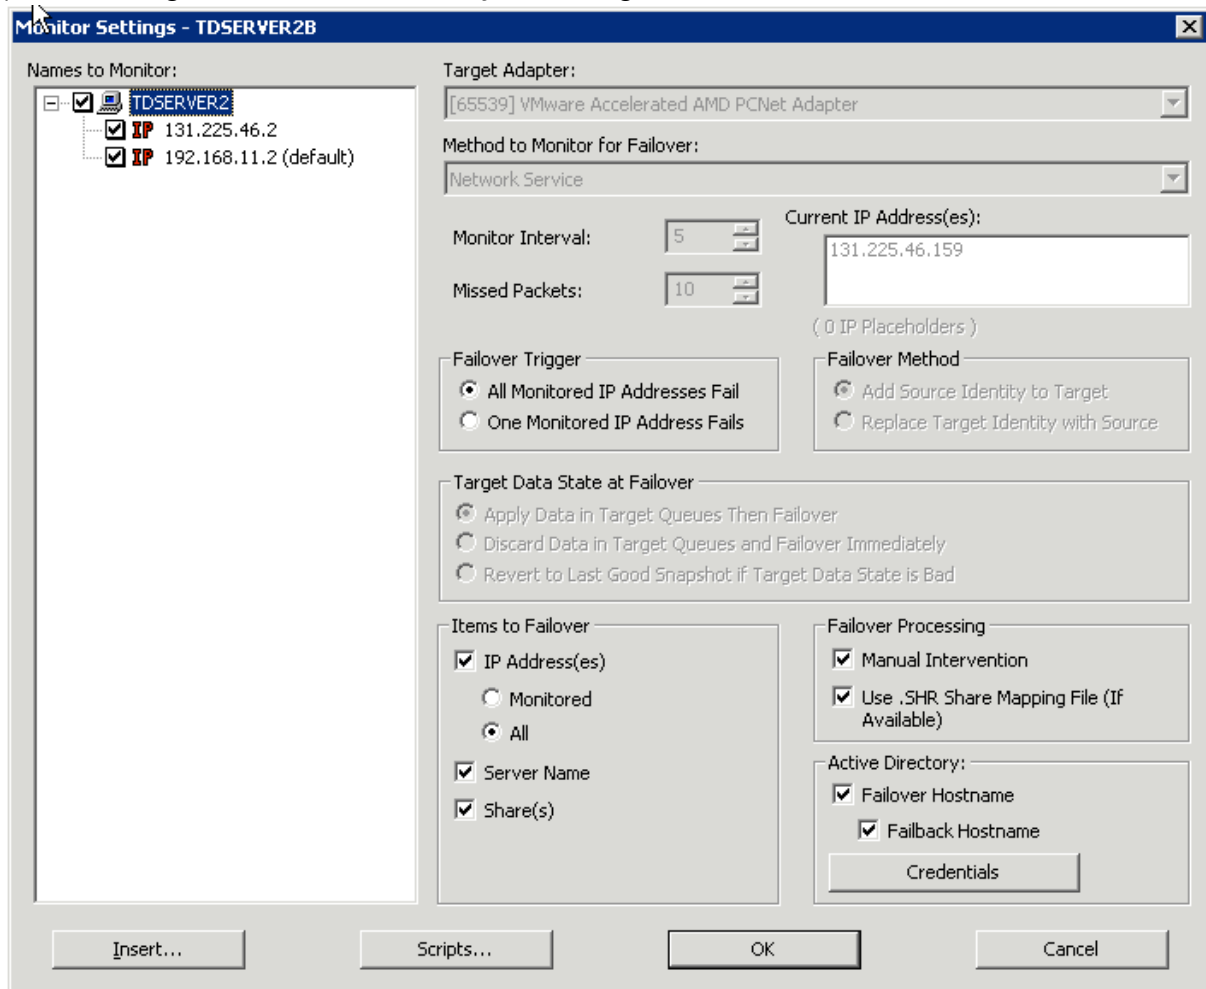

All you should need to do is check the box next to "TDSERVER2", and press 'OK'
15) Close the Management Consoles